

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 914 844 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
12.05.1999 Bulletin 1999/19

(51) Int. Cl.<sup>6</sup>: **A63C 1/28**

(21) Application number: **98120633.7**

(22) Date of filing: **03.11.1998**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Edauw, Peter**  
31050 Camalo' di Povegliano (Treviso) (IT)  
• **Logger, Stephane**  
2613 HX Delft (NL)


(30) Priority: **06.11.1997 IT TV970155**

(74) Representative:  
**Modiano, Guido, Dr.-Ing. et al**  
**Modiano & Associati SpA**  
Via Meravigli, 16  
20123 Milano (IT)

(71) Applicant: **STYLUS S.P.A.**  
31033 Castelfranco Veneto (IT)

(54) **Ice skate**

(57) An ice skate, particularly for speed skating includes an upper half-frame (2) provided with means for coupling to a shoe (3) which oscillates on a same plane with respect to a lower half-frame (8) which is associated with a blade (9) which interacts with the ice. The upper half-frame of the skate can perform a forward translatory motion of the heel region and a backward translatory motion of the tip region. This allows the user to improve his skating.

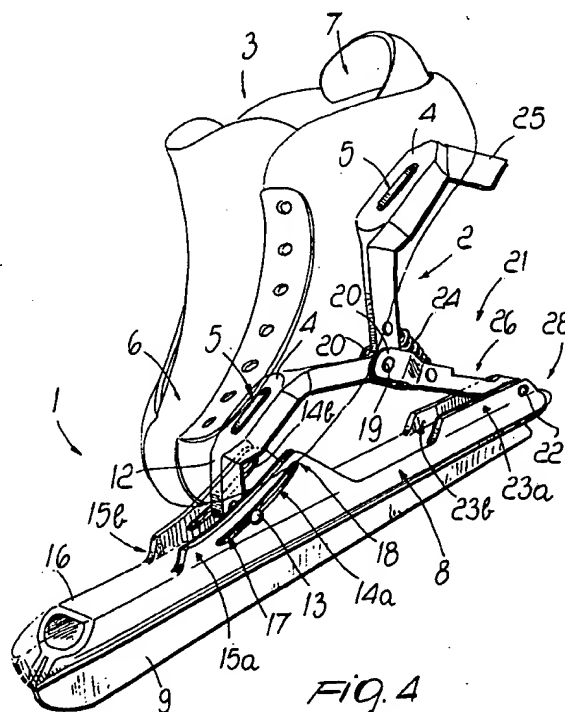

EP 0 914 844 A1

## Description

[0001] The present invention relates to an ice skate, particularly for speed skating.

[0002] Conventional ice skates are generally composed of a shoe associated with a support having a longitudinal steel blade which is used as a means for gliding on a frozen surface.

[0003] In conventional ice skates the shoe support is coupled to the blade in a fixed manner, so that every movement of the foot is matched by an equal movement of the support and therefore of the blade.

[0004] However, said conventional types of skate do not allow the user to skate in an optimum manner, since they do not allow optimum transmission of efforts from the foot to the blade because for example during thrusting the front part of the blade is loaded and may therefore catch at discontinuities in the ice.

[0005] WO 96/37269 discloses a frame for ice skates comprising an upper half-frame with means for coupling to a shoe and a lower half-frame which is coupled, by means of pivoting mechanisms, to said upper half-frame for an oscillation on a main plane. The half-frames can oscillate with respect to each other and perform a translatable motion along said main plane, entailing a forward oscillation of the foot both at the tip region and at the heel region.

[0006] A schematic illustration of the movement of the foot which can be achieved with this solution is given in the accompanying Figures 3, 10 and 11.

[0007] As mentioned, in this solution the translatable and rotary motion of the half-frames produces a forward movement of the entire foot and therefore of both the tip and the heel; bearing in mind that the blade of the ice skate is usually radiused, in the above solution the foot performs a forward movement, loading the front part of the blade, whose primary function is not thrusting but control.

[0008] Moreover, loading the forward region of the blade makes the blade penetrate the ice and may cause jamming at other discontinuities in the ice, accordingly making the skating action less efficient.

[0009] During thrusting, the point of the blade in contact with the ice that yields the highest efficiency can in fact be determined by means of a biomechanical study of the thrusting action: this study leads to consider that the part of the blade that allows highest efficiency during thrusting is the rearmost part, as shown for example in WO 9601671, which shows that during gliding over the ice the position of the skater entails a backward-shifted position of the pelvis so that the center of gravity is arranged at the point of contact between the blade and the ice.

[0010] The result is that the tip of the blade is not in contact with the ice while the rearward part of the blade is. This allows better gliding, since friction between the blade and the ice occurs in a point corresponding to the center of gravity of the skater and therefore in a point of

higher inertia.

[0011] During thrusting, the blade is arranged edge-ways on the ice, assuming, by means of the backward-shifted pelvis position, that the rearward region of the blade is always the one that is interfaced with the ice: in skating biomechanics terms, the thrusting line runs through the extension of the leg along a path which is determined by the alignment of the trunk, pelvis, knee, and ankle, and the continuation of said line through the ice allows to determine the point of contact between the blade and the ice which ensures the most efficient return of energy. This means higher acceleration in relation to the energy transmitted by the skater.

[0012] The cited skates force the skater to use the front part of the blade during the last steps of the thrusting action and this entails a slight speed reduction or braking effect due to the fact that the blade tends to catch in the ice and cut a groove.

[0013] This factor is even more important when skating on natural ice, which often has many cracks and imperfections and where the above-mentioned catching therefore occurs.

[0014] Therefore, the skater runs the risk of guiding the blade into one of these grooves rather than making the blade pass beyond this obstacle, but this requires continuous trajectory corrections, wasting energy which would be useful in skating.

[0015] An aim of the present invention is to solve the abovementioned technical problems, eliminating the drawbacks of the cited prior art by providing an ice skate, particularly for speed skating, which allows more efficient thrusting during skating.

[0016] An important object of the present invention is to provide an ice skate which allows optimum control of the blade even in the presence of grooves in the ice.

[0017] A further important object is to provide an ice skate in which the blade does not catch on the ice during thrusting.

[0018] A further important object is to provide an ice skate which allows the user to perform a biomechanically correct movement of the foot during thrusting.

[0019] A further important object is to provide an ice skate which optimizes interaction between the blade and the ice throughout skating, allowing the foot to maintain an optimum position in every step while skating.

[0020] Still a further object is to provide a structurally simple ice skate which is reliable and safe in use and has low manufacturing costs.

[0021] The above aim and objects, and others which will become apparent hereinafter, are achieved by an ice skate, particularly for speed skating comprising an upper half-frame having an articulation means for coupling to a foot support member which oscillates on a same plane with respect to a lower half-frame which is associated with a blade, characterized in that it comprises an articulation means which allows said upper half-frame to perform a forward translatable motion of the

heel region and a backward translatory motion of the tip region.

[0022] Further characteristics and advantages of the invention will become apparent from the following detailed description of a particular but not exclusive embodiment, illustrated by way of a nonlimitative example in the accompanying drawings, wherein:

Figure 1 is a schematic view of a skater using the skates according to the invention;

Figure 2 is a schematic view of the movement performed by the foot during thrusting as allowed by the skate according to the present invention;

Figure 3 is a view, similar to Figure 2, of the movement that the foot can perform according to the prior art described in the above cited patent;

Figure 4 is a partially sectional side perspective view of the skate according to the invention;

Figures 5, 6 and 7 are side views of the skate showing the articulation of the frame in different positions;

Figure 8 is a side view of a conventional ice skating blade;

Figure 9 is a view, similar to Figure 8, of the position assumed by the foot during the initial and final steps of the skating stride;

Figure 10 is a view, similar to Figure 9, of the initial condition of the position of the foot according to the prior art;

Figure 11 is a view, similar to Figure 10, of the final condition assumed by the foot according to the prior art.

[0023] With reference to the above figures, 1 designates a frame for ice skates, particularly for speed skating comprising an upper half-frame 2 which is constituted by a substantially V-shaped bar. The free ends of the bar are associated with a foot support member, for example a shoe 3, by means of a pair of bases 4 having first slots 5 for connection to the sole of the shoe by means of, for example, screws or rivets.

[0024] Advantageously, bases 4 are arranged respectively at the region 6 of the tip of the foot and at the heel region 7.

[0025] The frame comprises an articulation means which allow said upper half-frame 2 to perform a forward translatory motion of the heel region 7 and a backward translatory motion of the tip region 6 with respect to a lower half-frame 8 which is rigidly coupled to an ice skating blade 9 of the type having an arc-like configuration which forms a limited region 10 for interaction with the ice 11.

[0026] Said articulation means comprises a first tab 12 which protrudes at the end of the base 4 arranged at the tip region 6. First tab 12 protrudes downwards and forwards with respect to the base.

[0027] The tip of said first tab 12 is freely pivoted, by means of a first pivot 13, at a pair of second slots 14a

and 14b provided at a suitable pair of first shoulders 15a, 15b protruding upward on planes which are parallel to a flat surface 16 of lower half-frame 8.

[0028] The second slots 14a and 14b have an arc-like shape, with a first end 17 which is adjacent to said flat surface 16 and a second end 18 which is spaced further from said flat surface.

[0029] The second slots 14a and 14b have an arc-like shape whose concavity is directed toward the ice.

[0030] The distance between the first shoulders 15a and 15b is such as to allow to slidably position the first tab 12 between said shoulders, optionally interposing a material which is adapted to improve sliding.

[0031] The upper half-frame 2 is articulated at its vertex, by means of a second pivot 19, to a pair of wings 20 of an arm 21 which is freely pivoted, at its other end, by means of a third pivot 22, to a pair of second shoulders 23a and 23b protruding above said flat surface 16 of the lower half-frame 8 at the heel region 7.

[0032] Advantageously, the third pivot 22 is associated proximate to the rear end of said pair of second shoulders 23a, 23b.

[0033] The articulation between said lower half-frame 8 and said upper half-frame 2 is limited by the presence of a flexible element which can be interposed between them. Said element is constituted by a cylindrical helical elongation spring 24 which is interposed between the arm 21 and the adjacent wing of the upper half-frame 2 which is directed toward the heel region 7.

[0034] A second tab 25 protrudes at the tip of the base 4 that lies below the heel region 7 and can be arranged, in the inactive condition, at a suitable recess 26 formed in the arm 21, as shown in Figure 5.

[0035] The longitudinal extension of the arm 21 and the dimensions of the upper half-frame 2 and of the pair of first shoulders 15a and 15b is such as to allow, in the inactive condition shown in Figure 4, the arm 21 to rest on the flat surface 16 of the lower half-frame 8 so that the end that is articulated to the upper half-frame 2 lies proximate to the tip of the adjacent first shoulders 15a and 15b. In this condition the first pivot 13 abuts against the first end 17 of the second slots 14a and 14b.

[0036] In this condition, the foot is therefore arranged approximately parallel to the surface of the ice 11.

[0037] The use of the invention is as follows: Figures 5, 6 and 7 show the three significant steps that illustrate the articulation and translatory motion of the shoe which occur during the extension produced by the thrusting and extension action during skating.

[0038] In Figure 5, the frame is in the inactive position, whereas in Figure 6 the frame is approximately extended halfway.

[0039] During this step, the first pivot 13 slides within the second slots 14a and 14b so as to move from the first end 17 to the second end 18, while the arm 21 performs a clockwise rotation which allows the shoe to rise.

[0040] Figure 7 illustrates the condition in which the frame assumes its maximum extension and shows that

the heel region 7 is allowed to perform a forward translatable motion and the tip region 6 is allowed to perform a backward translatable motion.

[0041] This condition is shown in Figure 2 and shows that it allows to apply the load, during maximum thrusting, to the blade in a rearward region with respect to a median axis 27 thereof.

[0042] In view of the radiused shape of the blade 9 and of the forces that act thereon due to thrusting by means of the configuration of the upper half-frame, of the lower half-frame and of the means associated therewith, the resulting force R on the blade is assuredly located in the interspace between the median axis 27 and the rear end 28 of said blade, therefore allowing the front part of the blade to rise, passing over the obstacles that are often present in natural ice, such as for example ice produced by natural elements such as wind and temperature.

[0043] In the maximum extension condition, shown in Figure 7, it can be seen that the first pivot 13 is arranged towards the rear end 28 of the blade 9 on the nearer side of the median axis 27, so that any further thrusting always ensures transmission of force to the blade in the interspace between the median axis 27 and the rear end of said blade.

[0044] As shown in Figure 9, in the embodiment according to the present invention, the position of the heel varies very little between the inactive condition and the maximum extension condition, accordingly maintaining high efficiency in thrusting and very easy control during gliding, and this occurs both during thrusting and during the stride.

[0045] It has thus been observed that the invention has achieved the intended aim and objects, by providing a skate which allows to improve the efficiency of thrusting during skating and to achieve optimum control of the blade even in the presence of grooves in the ice.

[0046] Moreover, there is no catching of the front part of the blade on the ice, allowing the user to perform a biomechanically correct movement for the foot during thrusting and in general during any step of skating.

[0047] Finally, the skate according to the invention is structurally simple, is composed of a limited number of components and has low manufacturing costs, since the components can be manufactured by automated machining.

[0048] In this last case, since the frame is not based on the use of a single articulation, which requires mechanical characteristics which are present only in machinable metals or metal alloys, in fact allows the use of components obtained by means of more highly industrial processes, such as injection of high-performance polymers, die-casting of metal alloys or machining of extruded parts.

[0049] The skate according to the invention is susceptible of numerous modifications and variations within the scope of the appended claims.

[0050] The materials and the dimensions that consti-

tute the individual components of the structure may of course also be the most pertinent according to specific requirements.


[0051] The disclosures in Italian Patent Application No. TV97A000155 from which this application claims priority are incorporated herein by reference.

[0052] Where technical features mentioned in any claim are followed by reference signs, those reference signs have been included for the sole purpose of increasing the intelligibility of the claims and accordingly, such reference signs do not have any limiting effect on the interpretation of each element identified by way of example by such reference signs.

## Claims

1. An ice skate, particularly for speed skating comprising an upper half-frame (2) having an articulation means for coupling to a foot support member (3) which oscillates on a same plane with respect to a lower half-frame (8) which is associated with a blade (9), characterized in that it comprises an articulation means which allows said upper half-frame to perform a forward translatable motion of the heel region (7) and a backward translatable motion of the tip region (6).
2. The skate according to claim 1, characterized in that said upper half-frame (2) comprises a substantially V-shaped bar having free ends, coupling means being provided at said free ends for coupling to a shoe said coupling means comprising a pair of bases (4), said bases being arranged at the region of the tip (6) of the foot and at the heel region (7), first slots (5) being provided at the bases (4) for connection to said foot support (3).
3. The skate according to claim 2, characterized in that said articulation means further comprises a first tab (12) which protrudes at the end of said base (4) that is arranged at the tip region (6), said first tab (12) protruding in a downward direction and forwards with respect to said base, the tip of said first tab being freely pivoted, by means of a first pivot (13), at second slots (14a, 14b) formed at a first shoulders (15a, 15b) which protrude upward and along planes which are parallel to a flat surface (16) of said lower half-frame.
4. The skate according to claim 3, characterized in that said second slots (14a, 14b) have an arc-like shape, with a first end which is adjacent to said flat surface (16) and with a second end which is further spaced from said flat surface, said second slots having a concavity directed toward the ice surface.
5. The skate according to claim 4, characterized in that the distance between said first shoulders (15a,

- 15b) is such as to allow the positioning and sliding of said first tab (12) between them, optionally with the interposition of a material suitable to improve sliding.
6. The skate according to claim 5, characterized in that said upper half-frame is articulated at its vertex, by means of a second pivot (19), to a pair of wings (20) of an arm (21) which is freely pivoted at its other end, by means of a third pivot (22), to a pair of second shoulders (23a, 23b) which protrude in an upward region with respect to said flat surface (16) of said lower half-frame at the heel region (7).
7. The skate according to claim 6, characterized in that said third pivot (22) is associated proximate to the rear end of said pair of second shoulders (23a, 23b).
8. The skate according to claim 7, characterized in that the articulation between said lower and upper half-frames is limited by a flexible element (24) which can be interposed between them, said element being constituted by a cylindrical helical elongation spring (24) which is interposed between said arm (21) and the adjacent wing of said upper half-frame (2) that is directed toward the heel region (7).
9. The skate according to claim 8, characterized in that a second tab (25) protrudes at the tip of said base (4) that lies below the heel region (7) and can be positioned, in the inactive condition, at a recess (26) formed in said arm, the longitudinal extension of said arm (21) and the dimensions of said upper half-frame and of said pair of first shoulders being such as to allow, in the inactive condition, said arm (21) to rest on said flat surface (16) of said lower half-frame (8) so that the end that is articulated to said upper half-frame (2) is proximate to the tip of said adjacent first shoulders (15a, 15b), said first pivot (13) being arranged, in this condition, in abutment against said first end (17) of said second slots (14a, 14 b).
10. The skate according to claim 9, characterized in that it during extension said first pivot (13) slides within said second slots (14a, 14b) and moves from said first end (17) to said second end (18) while said arm (21) performs a clockwise rotation which allows the shoe to rise.
11. The skate according to one or more of the preceding claims, characterized in that in the maximum extension condition the force applied to said blade, due to thrusting, is located in the interspace between the median axis (27) of said blade and the rear end (28) of said blade (9).
12. The skate according to one or more of the preceding claims, characterized in that in the maximum extension condition said first pivot (13) is arranged at a point which lies on an axis which is rearward with respect to the median axis (27) of said blade.
13. The skate according to one or more of the preceding claims, characterized in that the articulation formed between said upper half-frame and said lower half-frame has a trapezoidal geometry.
14. The skate according to claim 13, characterized in that the distance between the points where said upper half-frame is articulated to said pairs of first and second shoulders of said lower half-frame is approximately equal to half the length of the blade (9).

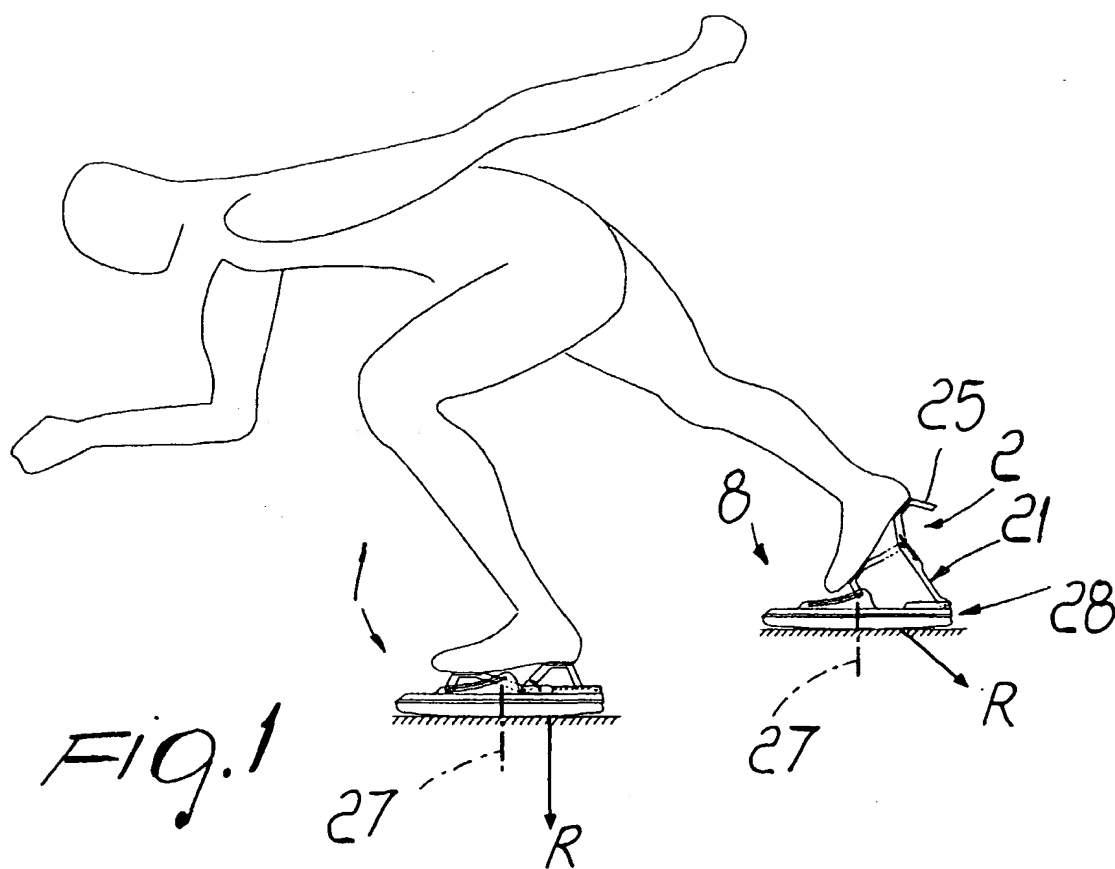

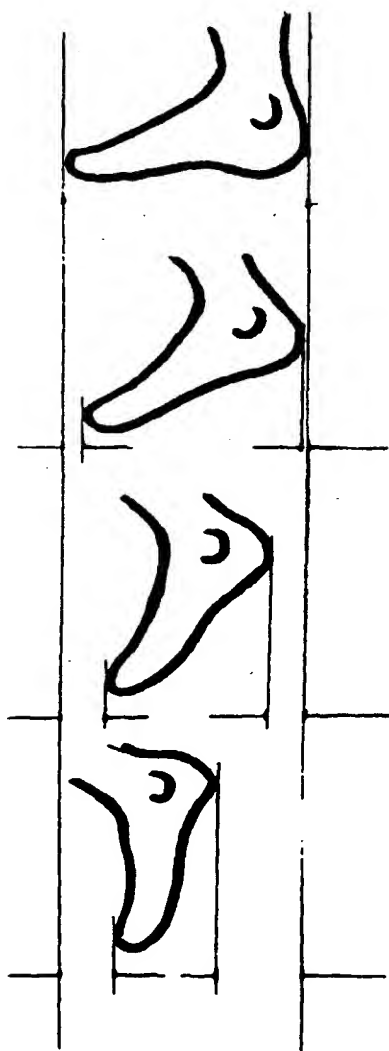


Fig. 2





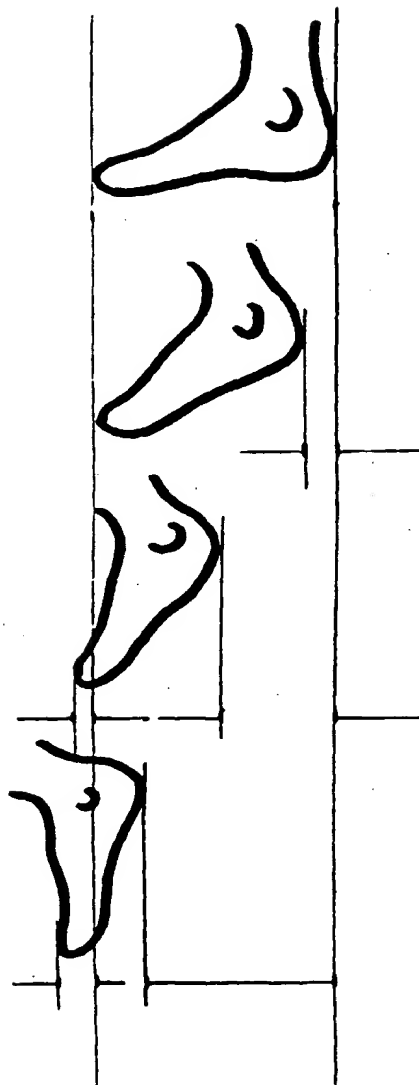




Fig. 3 PRIOR ART

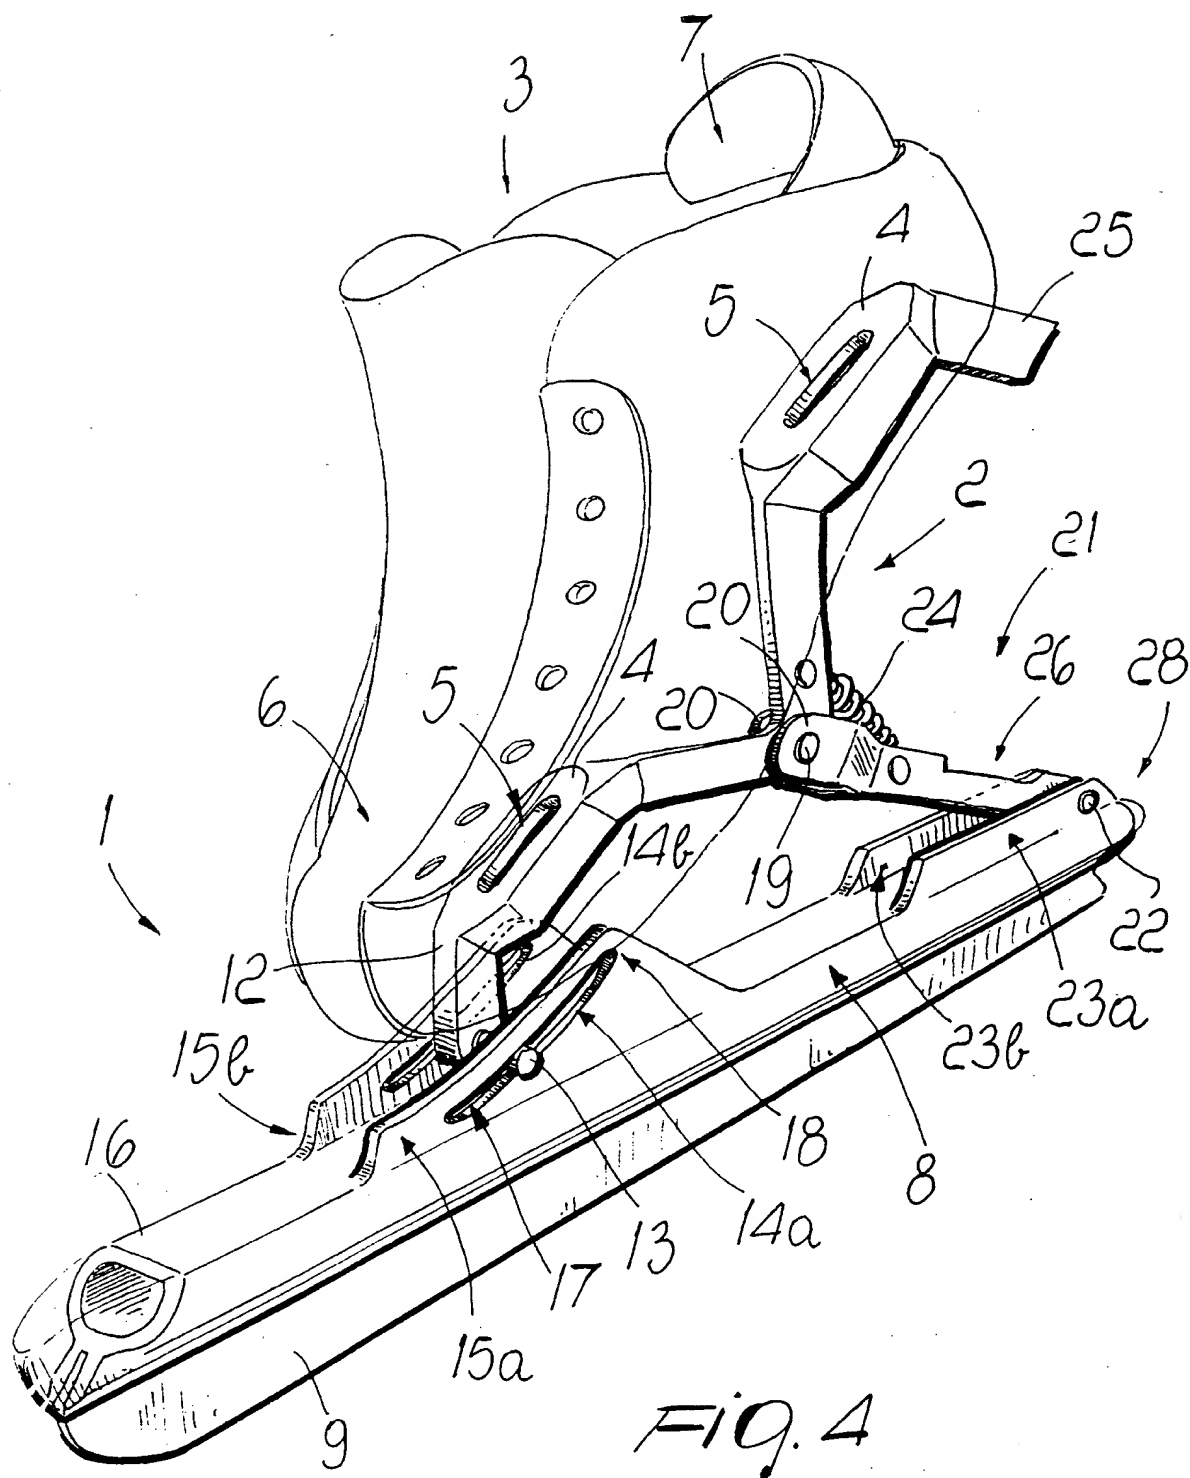

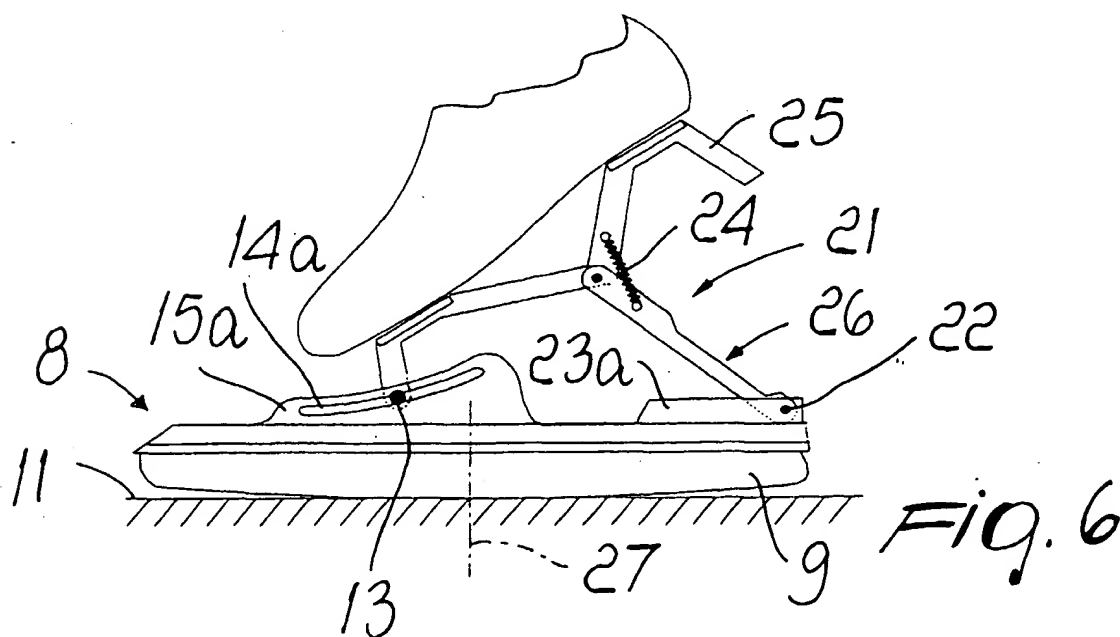


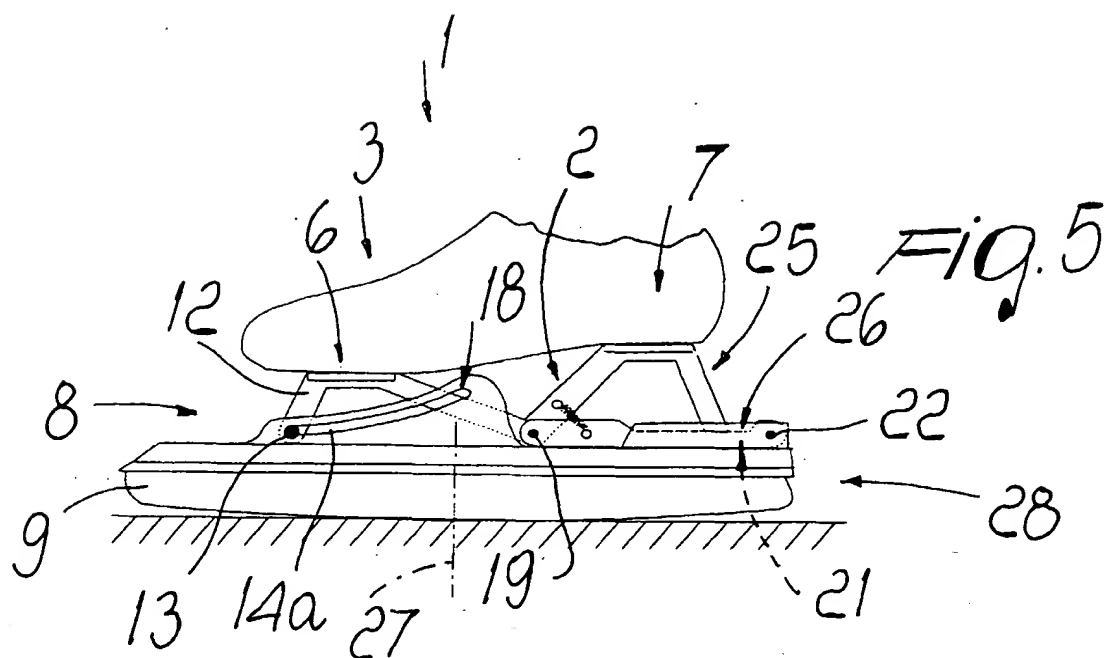

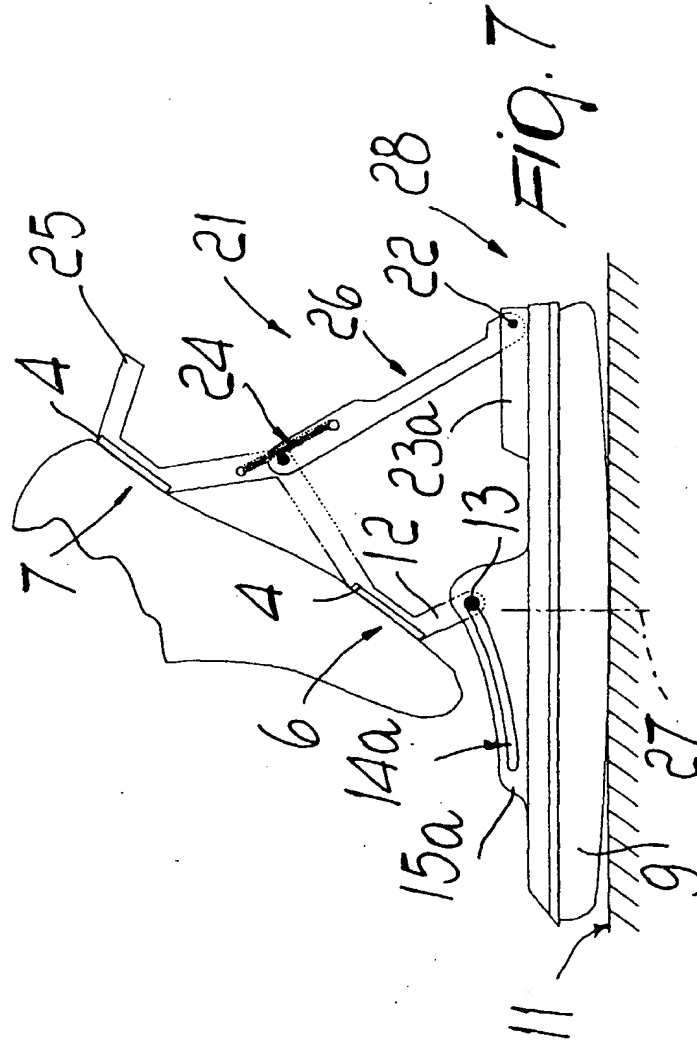


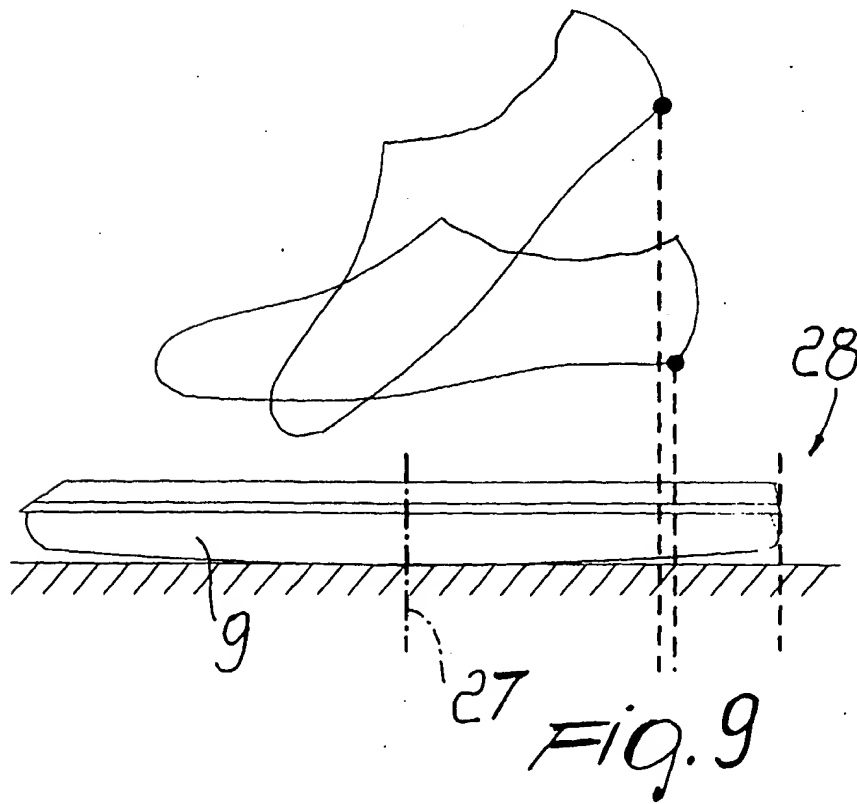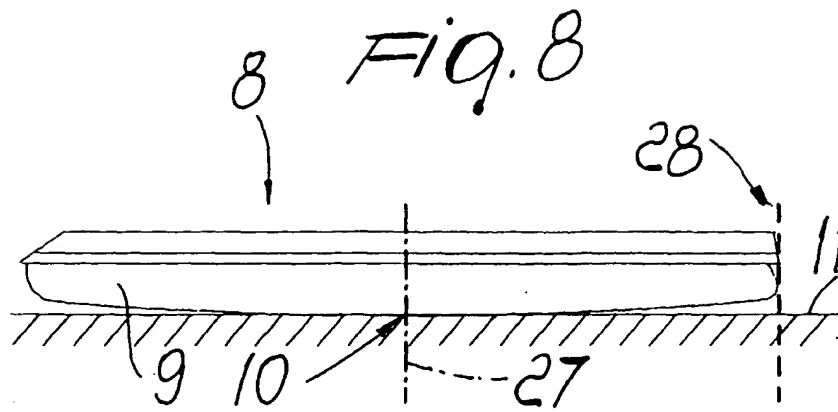

*Fig. 10* PRIOR ART

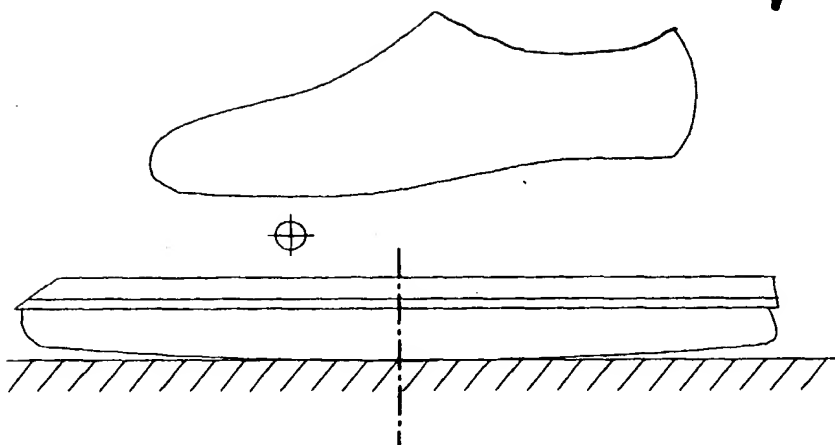

*Fig. 11* PRIOR ART

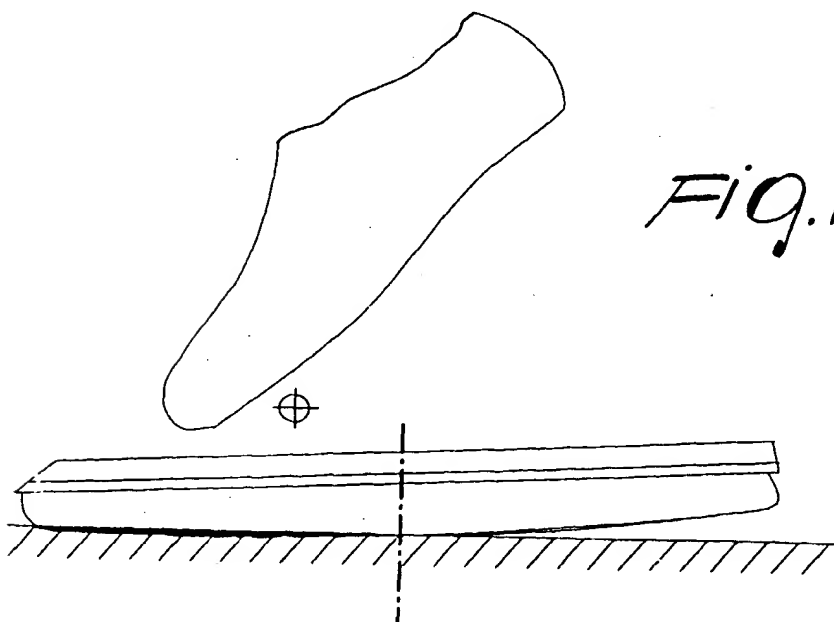



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 12 0633

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
D,A	WO 96 37269 A (GIERVELD BEHEER BV ;GIERVELD JOHAN (NL)) 28 November 1996 * abstract; figures 7A,8,32B,33B *	1,2,8,9,13	A63C1/28
A	"KLAPSCHAATS NU PRODUKTIERIJP" INGENIEUR, vol. 107, no. 18, 8 November 1995, page 47 XP000539646	1,8,9,13	
A	EP 0 718 012 A (EMERY SOC) 26 June 1996 * column 1, line 34 - column 2, line 58; figures 1,2 *	1	
A	WO 93 14840 A (NORDICA SPA) 5 August 1993 * figure 1 *	2,3,8,9	
A	DE 78 733 C (HANNES KARL) 26 January 1894 * figures 1,2 *	1,8	
A	GB 2 160 780 A (HAWKES BARRY ALAN) 2 January 1986 * column 1, line 31 - column 2, line 70; figure 1 *	2,8	TECHNICAL FIELDS SEARCHED (Int.Cl.6)  A63C
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>11 February 1999</b>	Examiner <b>Feber, L</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 12 0633

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-02-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9637269 A	28-11-1996	AU 695197 B	06-08-1998
		AU 5845996 A	11-12-1996
		CA 2221834 A	28-11-1996
		NL 1003205 C	04-12-1996
		NL 1003205 A	26-11-1996
		NO 975375 A	24-11-1997
EP 0718012 A	26-06-1996	NONE	
WO 9314840 A	05-08-1993	IT 1257578 B	01-02-1996
		AT 139456 T	15-07-1996
		AU 3351993 A	01-09-1993
		CA 2107347 A	01-08-1993
		DE 69303235 D	25-07-1996
		DE 69303235 T	28-11-1996
		EP 0578800 A	19-01-1994
		US 5405156 A	11-04-1995
DE 78733 C		NONE	
GB 2160780 A	02-01-1986	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**